

Up to 28,893 Lumens, 150W, 193 L/W, 120-277 VAC

Date

Project

Part #



Applications

- Retail
- Warehousing
- Manufacturing

Features

- Up to 28,893 Lumens, 150W, 193 L/W
 - 125W, 138W also available
- Key Retail Features:
 - Low Glare UGR<20
 - 10% Uplight to illuminate ceilings
 - Wide distribution to illuminate vertical surfaces (walls, racks)
 - 80 CRI Standard, High CRI optional
- 120-277 VAC
- Seven Year warranty²
- Ten Year warranty optional
- See Website for Installation Guide and IES File

World Wide Certifications [Pending]

- UL, DLC Premium, CE, BSMI
- IP65 / UL wet listed
- See regional section for applicable certification




IP65

Control Options

- Wireless:
 - Synapse wireless
- Local Fixture Control:
 - 0-10V control
- Dims to 10% then to off

Mechanical

- 7.93 lbs / 3.60 kg
- 1.5 m / 4.9 ft Safety Harness
- 2.0 m / 6.6 ft Jack Chain
- 1.8 m / 6.0 ft Electrical Cable

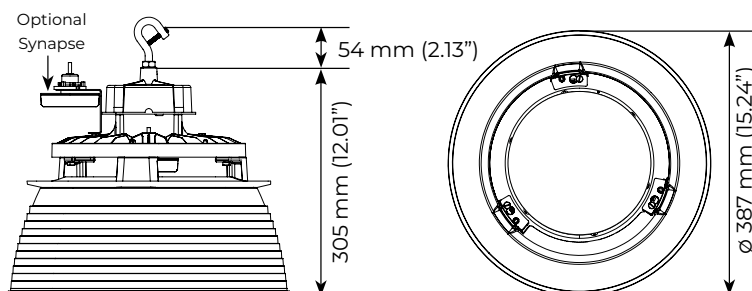

1. Unless otherwise specified, all values are typical at 25°C 277VAC ± 10% tolerance
 2. [See limited warranty for details](#)
 3. Specifications subject to change without notice

4. Not intended for use in environments containing airborne corrosive agents such as chemicals, solvents, or cutting fluids

Date Project Part #

Photometry

- Patented Optic provides:
 - Low Glare UGR<20
 - 10% Uplight to illuminate ceilings
 - Distribution tailored to illuminate vertical walls and high rack surfaces

Lumens (with Reflector & Uplight)

CRI	Power	Lumens @ CCT				
		2700K	3000K	3500K	4000K	5000K
80	125W	-	-	-	24,844	24,844
80	138W	-	-	-	27,187	27,187
80	150W	-	-	-	28,893	28,893

Electrical

- VS: 120-277 VAC, 50-60Hz
- <1% Flicker
- PF > 0.9, THD<20%
- Surge: 6 kV (L-N), 6kV (L-G, N-G)

	Amps @ Line Voltage (VAC)			
	VS			
	120V	220V	240V	277V
125W	1.04A	0.57A	0.52A	0.45A
138W	1.15A	0.63A	0.58A	0.50A
150W	1.25A	0.68A	0.63A	0.54A

Part # Key

- Not all combinations are valid or readily available - See ordering table for standard models
- Call for availability of custom features - MOQ may apply

Series		Certification		Power		CRI		CCT		Driver		Finish		Optics		Accessory		Control Module	
RH1	Retail Highbay	FIX FEU	North America Europe, Taiwan	125 138 150	125W 138W 150W	8	80 CRI	40 50	4000K 5000K	VS	120-277V	WH	White	110	110° Beam	000 RUI RFL	None Reflector +Uplight Reflector	000 300 TSY T30	None 3 Pin Connector 3 Pin Top Side Synapse Top Side 3 Pin Connector

Mounting/cord length		Future Field		Termination		Other	
0000 K020	None Jack Chain 2.0M	000	N/A	A0W5	3 Power Wire + 2 Dimming Wires, each 1.8 m (6 ft) Cable, Bare Wire Termination	FL	
				A715	NEMA L715 Twist Lock, 1.8 m (6 ft)		

Date

Project

Part #

Applicable Regions

- North America
- [Certification pending]



IP65

Summary

- VS: Line Voltage 120-277VAC
- Certified to UL/ULC Standard and DLC Premium [Pending]

Ordering Table

- Additional combinations may be available - Inquire for availability

Power	CRI	CCT	Lumen	L/W	Part Number	Part Code
138	80	4000K	27,187	197	RH1-FIX-138-8-40-VS-WH-110-RU1-TSY-K020-000-A715-FL	03558